

Team Flip

Assembly Instructions

Tools Required: Powered Screwdriver



Team Flip

Assembly Instructions

Thank you for purchasing Knight product, please carefully read the assembly instructions prior to installment to gain a complete understanding of the product. It provides you with important information about the safety, use, installation and maintenance.

WARNING: FAILURE TO COMPLY WITH OR OBSERVE ALL ASSEMBLY, SAFETY AND OPERATION INSTRUCTIONS REGARDING THE USE OF THIS PRODUCT MAY RESULT IN SERIOUS BODILY INJURY.

SAFETY

- The product must be used in a safe manner. Inappropriate use may cause damage to the product and/or cause bodily harm to the user or persons nearby.
- Don't locate furniture in direct sunlight or near air-conditioning inlet or heating radiator.
- Don't put high-temperature or frozen objects on furniture.
- Safely carry product to location of assembly.
- Retain this operation manual and pass it on to any future owner.

SET UP AND INSTALLATION

- Assemble the product according to the assembly instructions.
- To prevent possible scratches or damage, assemble the product on a soft surface such as a blanket, carpet or packaging.
- Place the product a safe distance from window frames, radiators, furniture etc. so that persons cannot become trapped.

It is recommended that this product is assembled by 2 people.


Any questions contact Knight on 0800 143 143

Due to continuous improvement of our products, our assembly instructions may not be in complete accordance with the product and we apologise in advance.




Step 1

Fit the pull bar to the top side of the mechanism according to the number corresponding to your worksurface depth. This number will locate over of the raised cylinder.

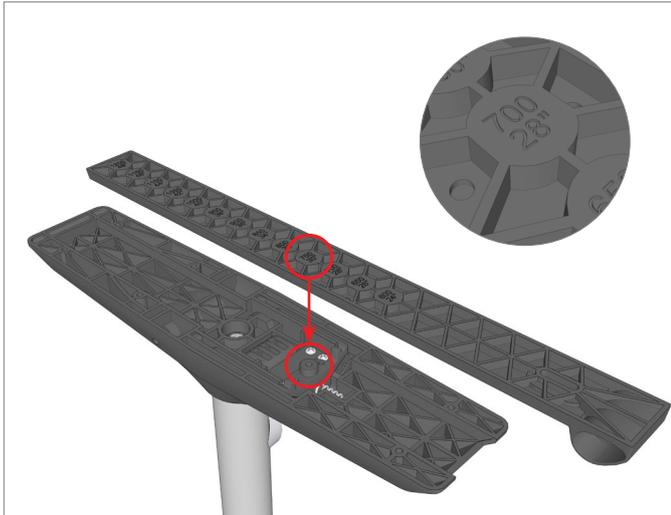


Step 2

Place the pull bar **(a)** and cross tube **(b)** in the correct location pictured below, slide the 2 end legs in place, and tighten 2 small screws into the cross tube.

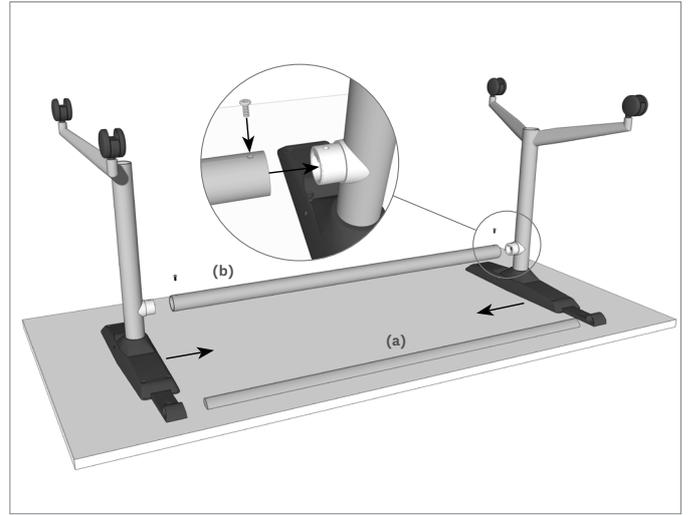


Step 3

Ensure the frame is located in the centre of the worksurface. Fully tighten all 6 screws on each mechanism.

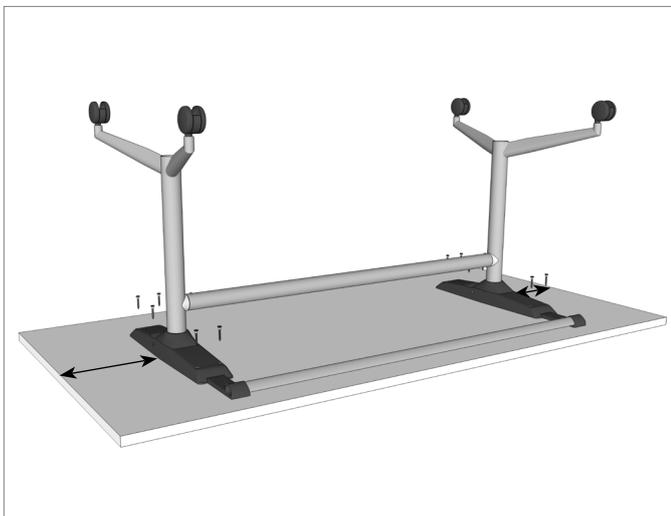


Step 4

On all tables with width larger than 700mm, secure the pull bar with the supplied washer and screw in the location pictured below (slot end closest to the pull-bar). Leave screw 1 turn from tight so the pull-bar can be operated smoothly.

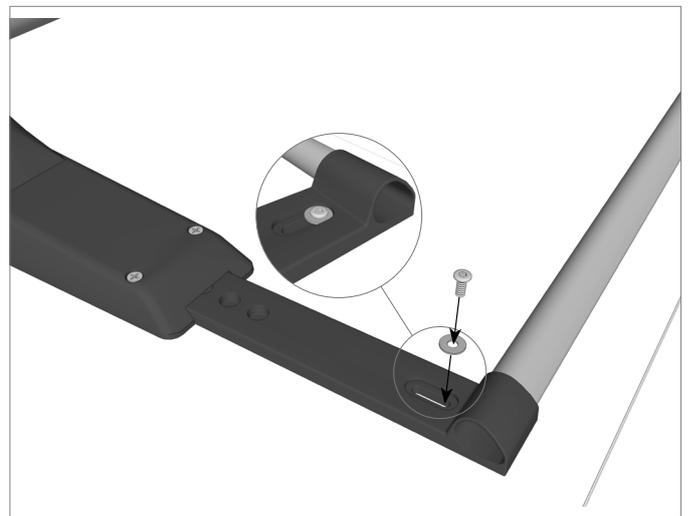

Drilling Patterns for Team Flip Tables

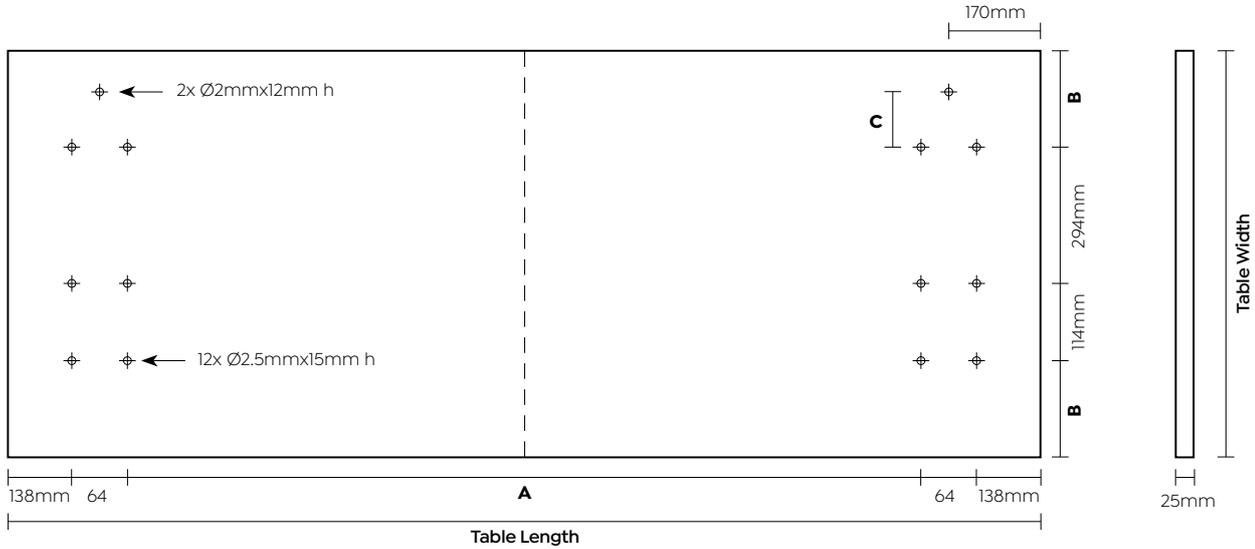


Width - 700mm	A	B	C
900-1300mm	496	146	NA
1200-1600mm	796	146	NA
1500-1900mm	1096	146	NA
1800-2200mm	1396	146	NA

Width - 800mm	A	B	C
900-1300mm	496	196	125
1200-1600mm	796	196	125
1500-1900mm	1096	196	125
1800-2200mm	1396	196	125

Width - 900mm	A	B	C
900-1300mm	496	246	175
1200-1600mm	796	246	175
1500-1900mm	1096	246	175
1800-2200mm	1396	246	175

Hole Position for Optional Connector

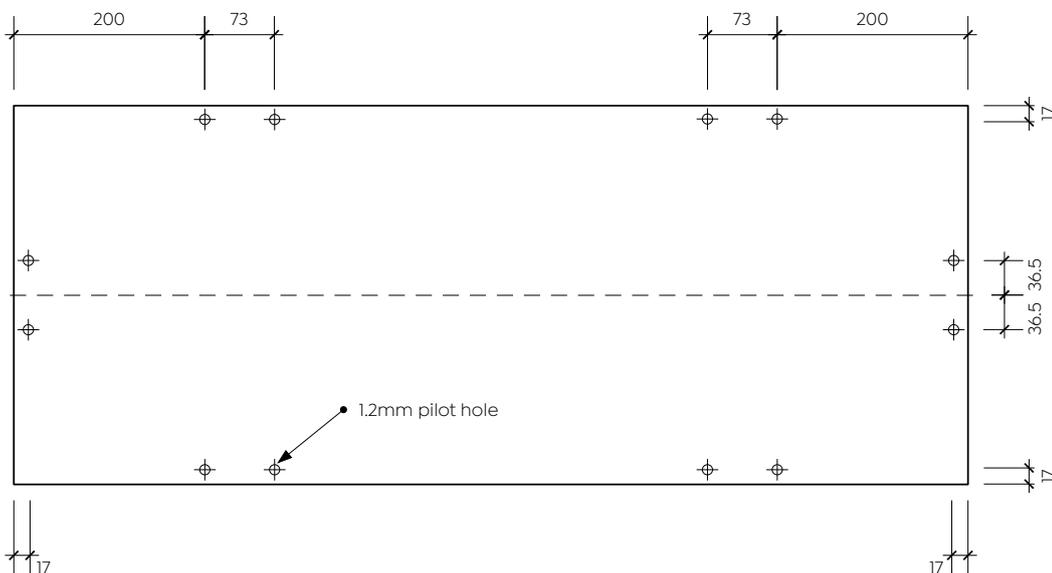

Locked



Unlocked