

# Team Meeting Table

## Assembly Instructions

**Tools Required:** Powered Screwdriver, Rubber Mallet, 4mm and 6mm Allen Key.



# Team Meeting Table


## Assembly Instructions

### COMPONENTS

- 1 Leg x4
- 2 Adjustable Foot x4
- 3 Leg Cable Cover x4
- 4 Rail x4
- 5 2 Way Connector x4
- 6 2 Way Connector Cap x4
- 7 Table Top x1

### SCREWS

- 8 M8x12mm Dome Head x8
- 9 M8x20mm Cap Head x4
- 10 10Gx20mm Self Tapping x8

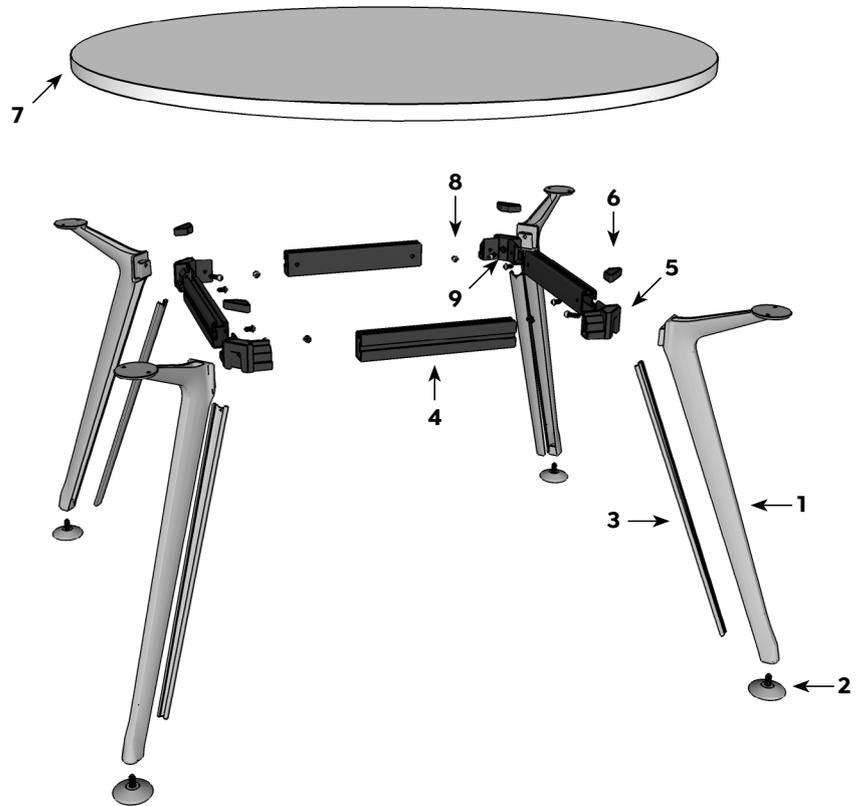


### IMPORTANT NOTES!

Prior to installment, use or maintenance of the desk frame, any installer and any user of the desk must study this assembly and operation manual carefully, so as to gain a complete understanding of its content.



**WARNING:** FAILURE TO COMPLY WITH OR OBSERVE ALL ASSEMBLY, SAFETY AND OPERATION INSTRUCTIONS AND WARNINGS REGARDING THE USE OF THIS PRODUCT MAY RESULT IN SERIOUS BODILY INJURY.




**Recommended  
2-person Step**

To prevent possible scratches or damage, assemble the table upside down on a soft surface such as a blanket, carpet or packaging.

## Assembly Instructions


### Step 1

Slide the 2 way connectors over each leg, and securely lock into place using M8x20mm cap head bolts.

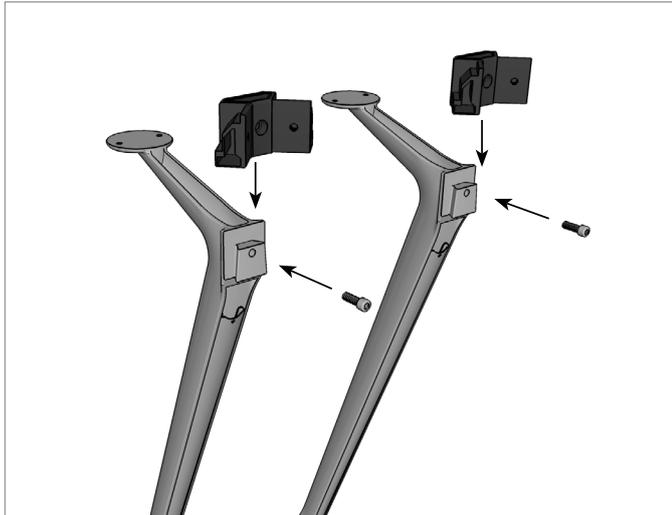

### Step 2

Securely connect legs to rails using the M8x12mm dome head bolts.

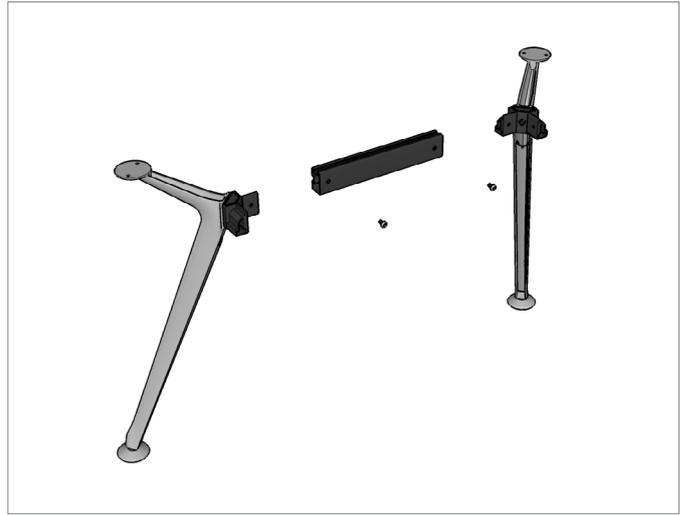


### Step 3

Securely connect legs to rails using the M8x12mm dome head bolts. **To secure rails to connectors place the rail onto the connector and firmly tap the end of the rail with a rubber mallet.**



### Note:

*Supplied table top may have pre-drilled holes on the underside, these holes may not align to your specific frame. If this is the case, the frame will need to be aligned to the top and new holes drilled separately and screws provided used.*

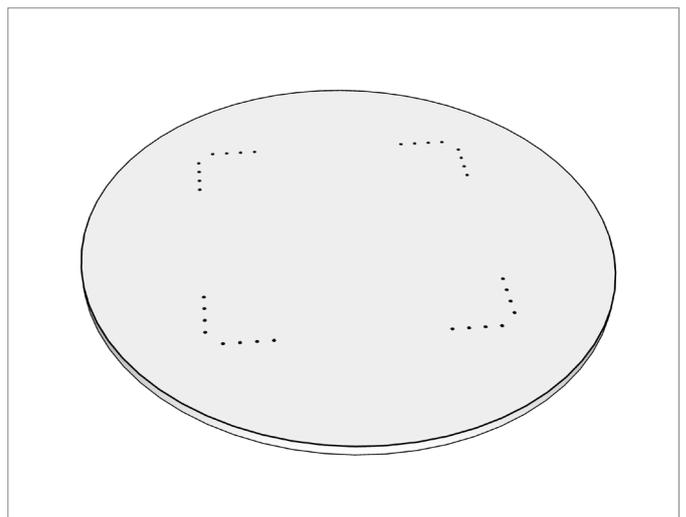


## Assembly Instructions

---


### Step 4

Ensure the worksurface is centered over the frame. Pre-drill holes in the worksurface. Fully tighten all 10Gx20mm self tapping screws through each leg.

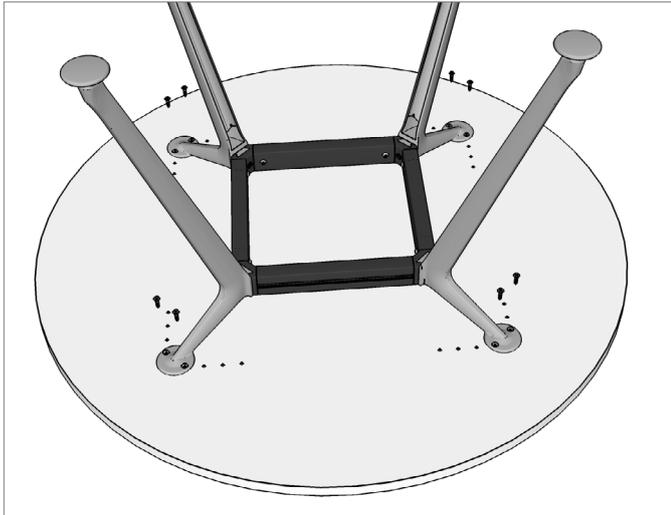

### Step 5

Conceal any power box cables using the clip leg cable covers.

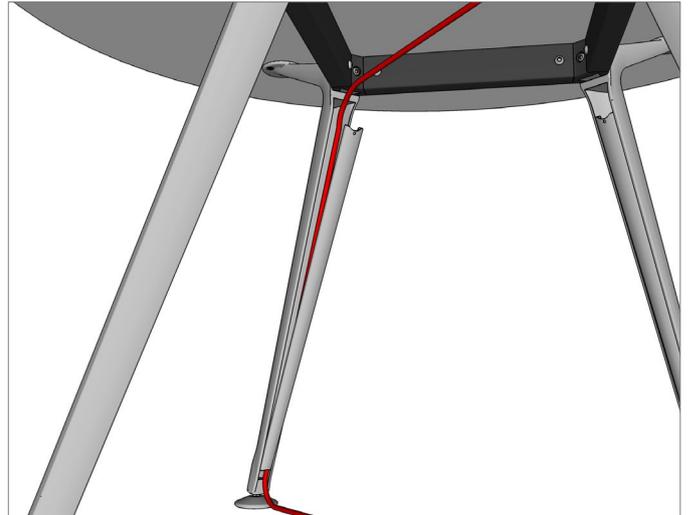

### Completed

---

